







## PET & PEN Films for Capacitors

---

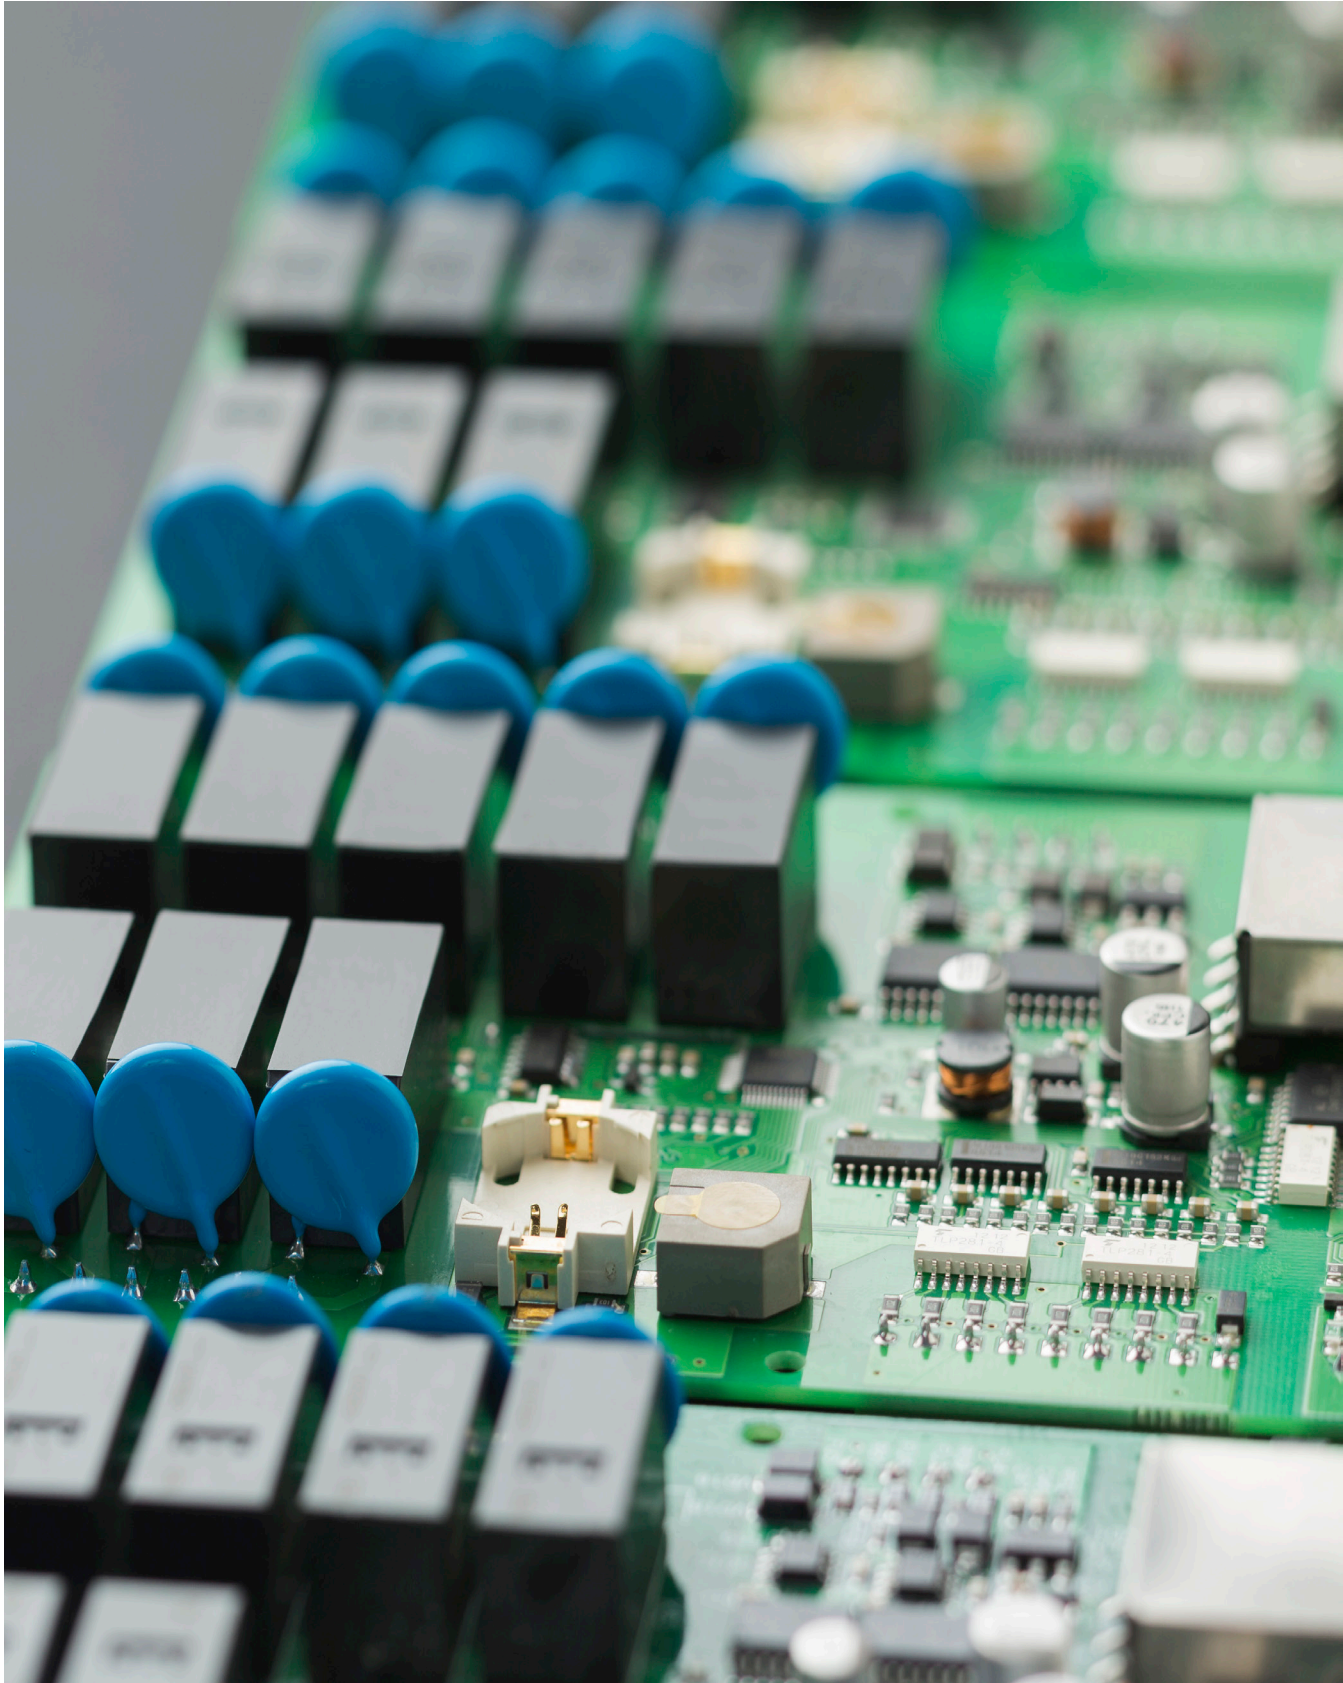

# Delivering specialty solutions for the capacitor industry

Mylar Specialty Films is the leading supplier of PET and PEN thin films for capacitor dielectrics. Our unique simultaneous stretching process gives our thin films the optimum balance of mechanical properties and thermal shrinkages which makes them the films of choice for both wound and stacked capacitors. In addition this specialized stretching process minimizes surface defects and leads to fewer voltage breakdown events in the finished capacitor.

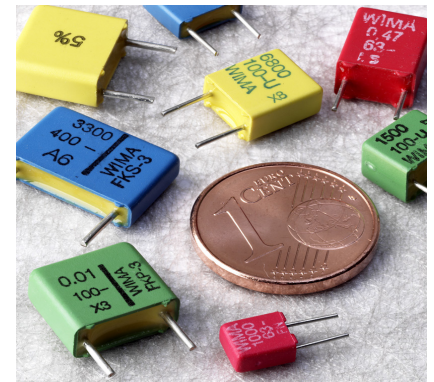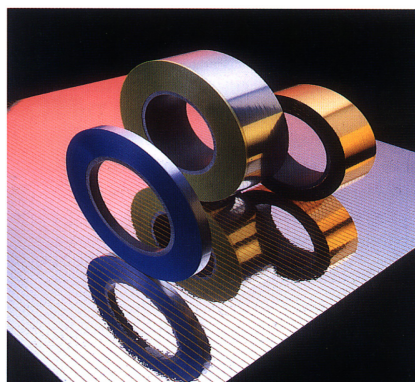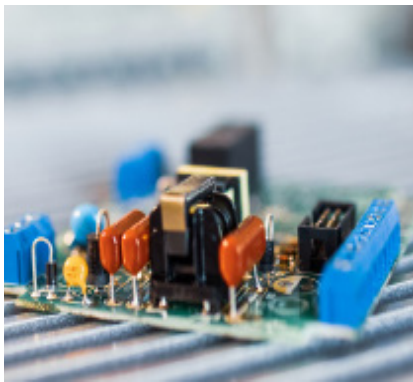

## Mylar® PET

Mylar® PET film capacitors are used in a wide range of applications where their smaller physical size than other filmic material capacitors makes them ideal for miniaturization of devices. Mylar® PET film can be readily metallized or can be combined with layers of aluminium foil to produce wound and stacked capacitors as well as SMD capacitors. The ability of metallized Mylar® PET film to “self heal” should there be any localized breakdowns gives an advantage for higher voltage applications.

## Kaladex® PEN

Kaladex® PEN films can be handled and processed in a similar way to PET however the distinct polymer chemistry of PEN provide superior properties including greater resistance to heat and hydrolysis, better dimensional stability and higher modulus. Kaladex® PEN is used in situations where a higher service temperature is required. Typical applications are in lead free soldered SMD capacitors and automotive lighting.

## Kaladex® PEN HV

Mylar Specialty Films has developed Kaladex® PEN HV film which provides a dielectric with a high service temperature (above 125 °C) and highest energy density compared to all current dielectrics. In addition when metallized it has excellent self healing properties. Potential Kaladex® PEN HV applications are high temperature power applications such as DC link in EV/HEV automotive and avionics, industrial energy conversion and renewable energy.

# Typical properties and product range for capacitor dielectrics

## Typical Properties

Material	Dielectric Constant (25 °C, 1kHz)	Dissipation Factor (%) (25 °C, 1kHz)	Breakdown Strength (V/mm)	Max Temp (°C)
Mylar® PET	3.25	0.5	290-350	125
Kaladex® PEN	3.05	0.5	290-350	150

## Product Range

Film	Film Type	Thickness micron (gauge)	Description
Mylar® C	PET	2.5 - 12.0 (10-48)	General purpose film with excellent thermal and mechanical properties
Mylar® CLS	PET	4.0, 4.8, 6.0 (16, 19.2, 24)	Improved thermal stability for stacked capacitors in SMD applications
Mylar® CLS02	PET	1.7, 1.9, 2.4 (6.8, 7.6, 9.6)	Improved thermal stability for stacked capacitors in SMD applications. Special low shrinkage version of Mylar® C
Mylar® CN	PET	5.2 (20.8)	Special low shrinkage version of Mylar® C
Mylar® CS02	PET	1.2, 2.4 (4.8, 9.6)	Specially designed for stacked capacitors (lower shrinkage compared to CW02)
Mylar® CS03	PET	1.2, 2.3 (2.4, 9.2)	Smoother film for low air layer
Mylar® CW02	PET	0.9, 2.4 (3.6, 9.6)	Specially designed for wound capacitors
Kaladex® Q71	PEN	6.0 - 16.0 (24-64)	High service temperature dielectric
Kaladex® Q72	PEN	1.2, 6.0 (4.8, 24)	High service temperature dielectric - low shrinkage film



[www.mylar.com](http://www.mylar.com)

contact us: [europe@mylar.com](mailto:europe@mylar.com) / [usa@mylar.com](mailto:usa@mylar.com) / [ap@mylar.com](mailto:ap@mylar.com)

#### **United Kingdom**

Mylar Specialty Films UK Ltd  
The Wilton Centre  
Redcar  
TS10 4RF

#### **Continental Europe**

Mylar Specialty Films Luxembourg SA  
BP-1681  
L-1016  
Luxembourg

#### **United States**

Mylar Specialty Films  
3600 Discovery Drive  
Chester  
VA 23836 USA

#### **Asia Pacific**

Mylar Specialty Films  
Room 702, 7th Floor, China Life Center  
Tower A, One Harbour Gate,  
No.18 Hung Luen Road, Hon Hom,  
Kowloon, Hong Kong

This information corresponds to our current knowledge on the subject. It is offered solely to provide possible suggestions for your own experimentations. It is not intended, however, to substitute for any testing you may need to conduct to determine for yourself the suitability of our products for your particular purposes. This information may be subject to revision as new knowledge and experience becomes available. Since we cannot anticipate all variations in actual end-use conditions, Mylar Specialty Films makes no warranties and assumes no liability in connection with any use of this information. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent right. © 2024 Mylar Specialty Films. All rights reserved, all trademarks and service marks denoted with "™" or "\*" are owned by Mylar Specialty Films or associated affiliates unless otherwise noted. Nothing contained herein shall be construed as a representation that any recommendations, use or resale of the product or process described herein is permitted and complies with the rules or regulations of any countries, regions, localities etc or does not infringe upon patents or other intellectual property rights of third parties. Melinex®, Mylar® and Kaladex® are registered trademarks of Mylar Specialty Films U.S. Limited Partnership.